

Easy anchoring starts with a Lewmar windlass

Whether you own a small fishing boat, a 160ft cruiser or a mid-size sailboat, Lewmar has a windlass designed to fit your exact needs. Each one is crafted with durability, convenience and affordability in mind. Both our vertical and horizontal designs are sleek and attractive to complement your boat.


Windlass selection guide

Model	BOAT LENGTH OVERALL						
	6 m 20 ft	9.2 m 30 ft	12.2 m 40 ft	15.2 m 50 ft	18.3 m 60 ft	21.3 m 70 ft	24.4 m 80 ft
CRW400							
Pro-Sport 550							
Pro-Series/Fish 700							
Pro-Series/Fish 1000							
H2							
H3							
V700							
CPX0- 500W							
CPX0-700W							
V1/CPX1							
V2/CPX2							
V3/CPX3							
V4/CPX4							
V5							
V6							

Model	BOAT LENGTH OVERALL									
	19.8 m 65 ft	22.9 m 75 ft	25.9 m 85 ft	29 m 95 ft	32.1 m 105 ft	35.1 m 115 ft	38.2 m 125 ft	41.2 m 135 ft	44.3 m 145 ft	50.3 m 165 ft
V8 2500W										
V8 Hi-Power										
V9										
V10										
V12										

Many parameters have to be taken into account when selecting a windlass, such as displacement, windage, anchor weight etc. In the above chart the boat length corresponds to a vessel with average displacement. If your vessel is of heavy displacement, please consider using a larger windlass model. Lighter shading represents the upper limit of the model. If in doubt, move up a model.

Chain guide

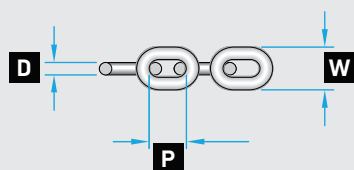

		6 mm DIN 766	6 mm ISO 4565	1/4" ACCO ISO G43 (G4)	7mm DIN 766	1/4" ACCO BBB (3B)	8mm DIN 766	8mm ISO 4565	5/16" ACCO ISO G43 (G4)	LEWMAR 9.5mm G40	3/8" CAMPBELL S4	10mm ISO 4565	3/8" CAMPBELL S3	10mm DIN 766	3/8" ACCO ISO G43 (G4)	11mm SHORT LINK	11mm DIN766	7/16" ACCO ISO G43 (G4)	LEWMAR 12mm G30/G40 12mm SHORT LINK	13mm DIN 766	1/2" ACCO ISO G43 (G4)	LEWMAR 14mm G30/G40 14mm SHORT LINK	14mm DIN 766	14mm STUDLINK	16mm SHORT LINK	16mm DIN 766
D	mm	6	6	7	7	7.14	8	8	8.4	9.5	10	10	10	10	10	11	11	11.8	12	13	13.2	14	14	14	16	16
	inch	0.236	0.236	0.276	0.276	0.281	0.315	0.315	0.329	0.374	0.39	0.394	0.37	0.394	0.394	0.433	0.433	0.464	0.472	0.512	0.520	0.551	0.551	0.551	0.630	0.630
P	mm	18.5	18	21.3	22	22.1	24	24	26.2	31.5	29	30	35	28	31	33	31	35.5	36	36	40.4	42	41	56	48	45
	inch	0.728	0.709	0.840	0.866	0.870	0.945	0.945	1.030	1.240	1.15	1.181	1.36	1.102	1.220	1.299	1.22	1.4	1.417	1.417	1.591	1.654	1.614	2.205	1.890	1.772
W	mm	20.4	21.6	24.4	23.8	25.2	27.2	28.8	29.7	31.6	35	36	34	36	35	39	40	40.1	40.5	47	45.7	49	50	50.4	56	58
	inch	0.803	0.85	0.962	0.937	0.992	1.07	1.134	1.168	1.244	1.3	1.417	1.31	1.417	1.378	1.535	1.575	1.578	1.594	1.850	1.799	1.929	1.969	1.984	2.205	2.283